


The Seakeeper 18 is designed to eliminate up to 95% of boat roll on recreational vessels ~65 to 75 feet (18-21 meters) or up to ~56 tons. It requires modest electrical power, has no outside appendages and can be installed virtually anywhere on board.

## TECH SPECS


<b>Rated Speed</b>	7,000 RPM
<b>Angular Momentum at Rated RPM</b>	18,000 N-M-S
<b>Max Anti-Rolling Torque at Rated RPM</b>	34,980 N-M
<b>Spool-up Time to Rated RPM</b>	55 minutes (7,000 RPM)
<b>Spool-up Time to Stabilization</b>	40 minutes (5,600 RPM)
<b>Spool-up Power</b>	
AC Motor	4000 Watts Max
DC Control	240 Watts
<b>Operating Power</b>	
AC Motor (sea state dependent)	2300 - 3700 Watts
DC Control	240 Watts
AC Input Voltage	208 - 230 VAC (+/-10%), 50/60 Hz, Single Phase
DC Input Voltage	24 VDC @ 10 Amps
<b>Sea Water Supply to Heat Exchanger</b>	30 LPM (8 GPM) Maximum 15 LPM (4 GPM) Minimum
<b>Ambient Air Temperature</b>	0° - 60° C (32° - 140° F)
<b>Weight (Approximate)</b>	2,244 lbs (1018 kg) Bolt-in Installation
<b>Envelope Dimensions</b>	Length x Width x Height 42.6 L x 43.2 W x 32.8 H (Inches) 1.08 L x 1.10 W x 0.83 H (Meters)
<b>Noise Output</b>	TBD



## PORT VIEW

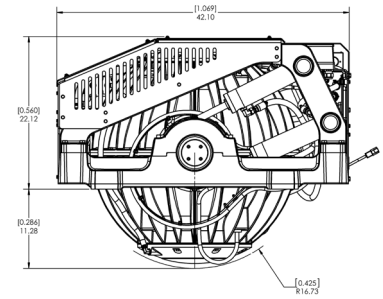

## FRONT VIEW

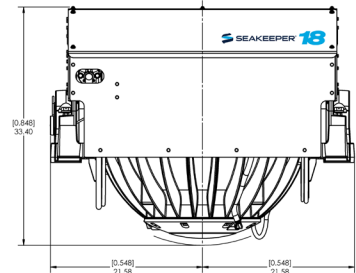

## TOP VIEW

