

SEAKEEPER® 4.5


We're proud to introduce to you Seakeeper's newest model, the **Seakeeper 4.5** for boats **40-45 feet**. We're sharing the below preliminary spec sheet with you so that you'll have adequate time to incorporate it into your model year 2024 designs where applicable. These specifications are **confidential** and are **subject to change** within a reasonable limit.




TECH SPECS

Max Rated Speed	9,300 RPM
Angular Momentum at Max Rated RPM	4,500 N-M-S
Anti-Rolling Torque at Max Rated RPM	11,776 N-M
Spool-up Time to Max Rated RPM	35 Minutes (9,300 RPM)
Spool-up Time to Stabilization	18 Minutes (6,975 RPM)
Power Consumption	
Spool-up Power	2,000 Watts
Operating Power	1,700 Watts
AC Power Input	110/220 VAC, 50/60 Hz
Control Power	125 Watts
Control Power Input	12 VDC @ 15 A
Seawater Pump Power Input	12 VDC @ 15 A
<i>Over Current Protection based on installed pump rating</i>	
Weight	728 lbs (330 kg)
Envelope Dimensions	26.7 L x 28.06 W x 20.16 H (inches)
	0.678 L x 0.712 W x 0.512 H (meters)
Noise Output	<70 dBC at 1 meter
Seawater Supply to Heat Exchanger	6 GPM (22 LPM) maximum
	2 GPM (7 LPM) minimum
Ambient Air Temperature	32° – 140° F (0° – 60° C)

PORT VIEW

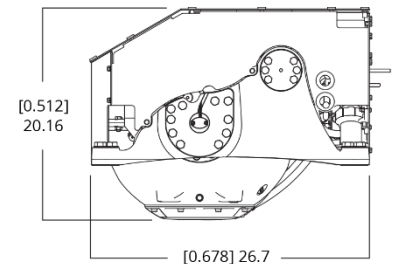

FRONT VIEW

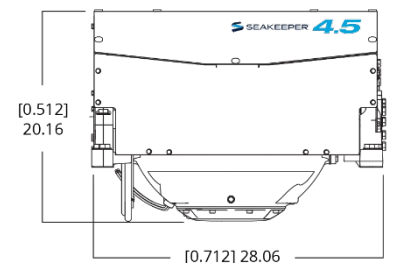

TOP VIEW

