




We're proud to introduce to you Seakeeper's newest model, the **Seakeeper 40** for boats **85 ft. and up**. We're sharing the below preliminary spec sheet with you so that you'll have adequate time to incorporate it into your model year 2025 designs where applicable. These specifications are **confidential** and are **subject to change** within a reasonable limit.


TECH SPECS

Max Rated Speed	5,150 RPM
Angular Momentum at Max Rated RPM	40,000 N-M-S
Anti-Rolling Torque at Max Rated RPM	104,720 N-M
Spool-up Time to Max Rated RPM	70 minutes (5,150 RPM)
Spool-up Time to Stabilization	40 minutes (3,863 RPM)
Power Consumption	
Spool-up Power	5,000 Watts
Operating Power	1,900-4,00 Watts
AC Power Input	208-230 VAC, 50/60 Hz
Control Power	240 Watts
Control Power Input	24 VDC @ 15 A
Seawater Pump Power Input	24 VDC @ 20 A
<i>Over Current Protection based on installed pump rating</i>	
Weight	4,074 lbs (1,848 kg)
Envelope Dimensions	54.3 L x 355.9 W x 40.6 H (inches)
	1.38 L x 1.42 W x 1.04 H (meters)
Noise Output	<73 dBC @ 3.3 feet (1 meter)
Seawater Supply to Heat Exchanger	13 GPM (49 LPM) minimum
	15 GPM (57 LPM) maximum
Ambient Air Temperature	32° – 140° F (0° – 60° C)

PORT VIEW

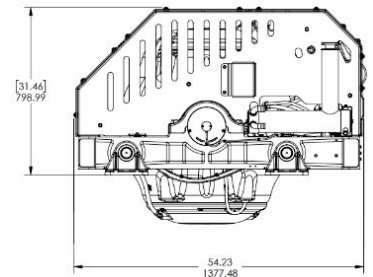

FRONT VIEW

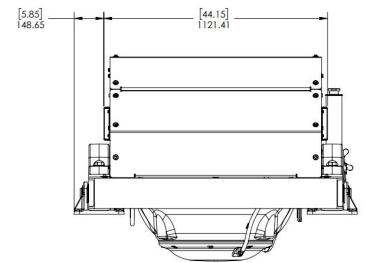

TOP VIEW

